
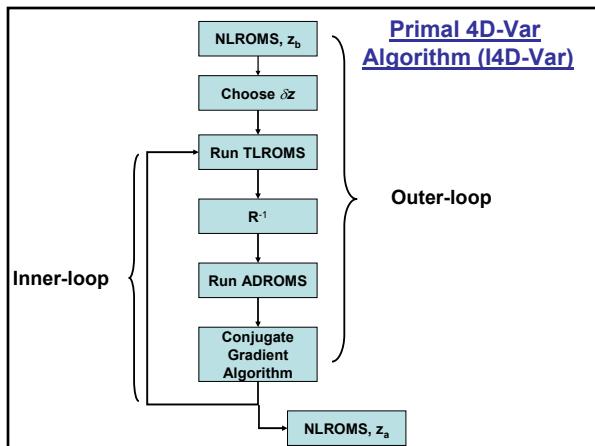



## Tutorial 2: Multiple Outer-Loops

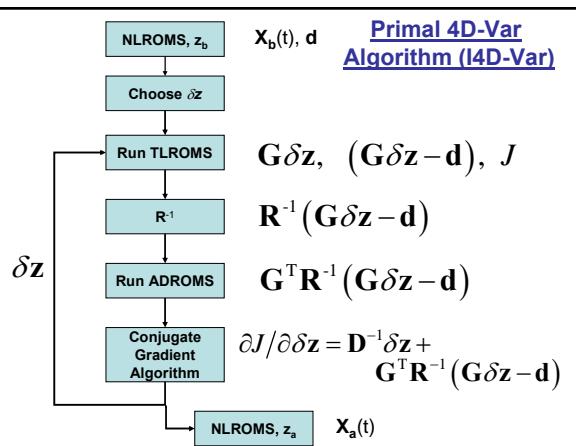

### Multiple Outer-Loops


- It is often advantageous to perform more than one outer-loop.
- During each outer-loop the NL ROMS solution is updated using the increments  $\delta z$  from the last inner-loop of the previous outer-loop.
- The updated NL ROMS solution is that about which TL ROMS and AD ROMS are linearized during the current outer-loop.
- Equivalent to solving a sequence of linear least-squares minimization problems.
- Can potentially help in identifying the global minimum of  $J_{NL}$  although not proven.

$$J_{NL}(\mathbf{x}) = \frac{1}{2}(\mathbf{z} - \mathbf{z}_b)^T \mathbf{D}^{-1} (\mathbf{z} - \mathbf{z}_b) + \frac{1}{2}(\mathbf{y} - H(\mathbf{x}))^T \mathbf{R}^{-1} (\mathbf{y} - H(\mathbf{x}))$$

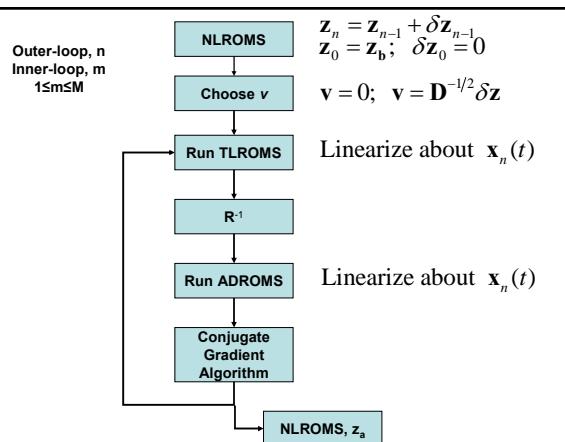

### Implementation in ROMS 4D-Var

- Number of inner-loops,  $m$ , and outer-loops,  $n$ , are controlled by *Ninner* and *Nouter* in the ocean.in file.
- Second level preconditioning option available using info gleaned about the shape of  $J$  ( $J_{NL}$ ?) from previous outer-loops:
  - spectral & Ritz preconditioning (Tshimanga et al, 2008)
  - s4dvar.in
    - Lprecond (T (on) or F (off))
    - Lritz (T (ritz) or F (spectral))
    - NritzEV (number of vectors to use)

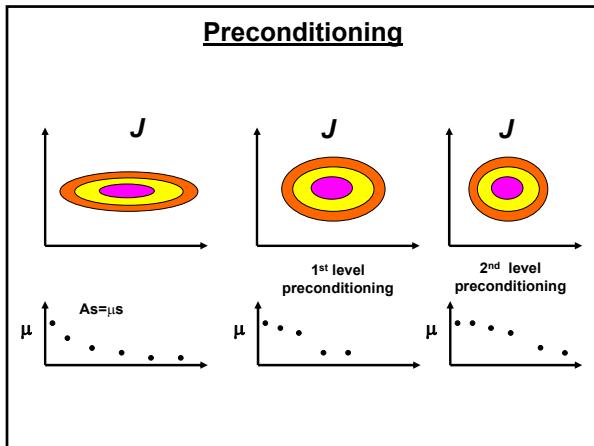

## 2<sup>nd</sup> Level Preconditioning

**Recall 1<sup>st</sup> level preconditioning via:**  $\mathbf{v} = \mathbf{D}^{-1/2} \boldsymbol{\delta z}$

**2<sup>nd</sup> level preconditioning proceeds via:**  $\mathbf{u} = \mathbf{U}_n^{-1} \mathbf{v}$   
 $(n = \text{outer-loop \#})$

**Recall:**  $\tilde{\mathbf{K}}_m = \mathbf{K}_b \Sigma \mathbf{C}^{1/2} \mathbf{V}_m \mathbf{T}_m^{-1} \mathbf{V}_m^T \mathbf{C}^{T/2} \Sigma^T \mathbf{K}_b^T \mathbf{G}^T \mathbf{R}^{-1}$   
 $(m = \# \text{ of inner-loops})$

**Following Tshimanga et al (2008):**

where  $(\theta_i, \mathbf{y}_i)$  are eigenpairs of  $\mathbf{T}_m$  and  $\hat{\mathbf{y}}_i = \mathbf{V}_m \mathbf{y}_i$

## 2<sup>nd</sup> Level Preconditioning

$$\text{Finally: } \mathbf{v}_n = \prod_{j=1}^{n-1} \mathbf{U}_j \mathbf{u}_j$$

and:  $\delta \mathbf{z}_n = \mathbf{D}_n^{1/2} \mathbf{v}_n = (\mathbf{K}_b)_n \Sigma \mathbf{C}^{1/2} \mathbf{v}_n$

### ROMS CCS example:

Ritz #	0	1	2	3	4	8
J	9173	3131	1877	1855	1833	1972

(Moore et al, 2010b)

## References

- Moore, A.M., H.G. Arango, G. Broquet, B.S. Powell, J. Zavala-Garay and A.T. Weaver, 2010a: The Regional Ocean Modeling System (ROMS) 4-dimensional data assimilation systems: Part I – System overview. *Ocean Modelling*, Submitted.
- Moore, A.M., H.G. Arango, G. Broquet, C.. Edwards, M. Veneziani, B.S. Powell, D. Foley, J. Doyle, D. Costa and P. Robinson, 2010b: The Regional Ocean Modeling System (ROMS) 4-dimensional data assimilation systems: Part II – Performance and application to the California Current System. *Ocean Modelling*, Submitted.
- Tshimanga, J., S. Gratton, A.T. Weaver and A. Sartenaer, 2008: Limited-memory preconditioners with application to incremental variational data assimilation. *Q. J. R. Meteorol. Soc.*, **134**, 751-769.